

Pitcon Softforms®

Mini-Catalog

(301) 927-1000 MD office
 (800) 897-3129 MD fax
 (602) 233-9100 AZ office
 (909) 773-0001 CA office
 www.pitconindustries.com

Following is the complete listing of our extruded aluminum plaster and drywall moldings. This line was designed to provide you with single source efficiency at competitive pricing. You may purchase both the Pitcon plaster moldings and drywall moldings at your local authorized Pitcon distributor. For a more complete description of each product, please refer to the Pitcon Industries full product line binder, available through your local sales representative or direct from the factory.

SWR SERIES

WALL REVEALS

SAMPLE SPECIFICATION
 specify as: SOFTFORMS® Model # SWR-XXX-XXX

Pitcon SOFTFORMS® LLC
 6409 Rhode Island Avenue, Riverdale, MD 20737
 (888) 213-0952 (800) 637-7638
 (301) 927-1000 (602) 233-9100
 Fax: (301) 699-8690 Fax: (602) 233-9400

The extruded aluminum profile shall incorporate a continuous integral tie for surface contact to conventionally installed gypsum drywall. The fins shall be 7/8" wide and shall be tapered to the edge. The tapered fins shall be finished with noise dampening to accept standard screw fastening. A series of continuous grooves shall be extruded into the face of the fins to provide greater bonding surface. The extruded profiles shall be primed with corrosion-resistant primer compatible with materials normally used in conjunction with commercial interiors, i.e.: joint compound, latex and enamel paints, and wall covering adhesives.

MATERIAL: Aluminum alloy.....6063 T5 or equal
 Finish.....Factory primed

NO SCALE TYPICAL SECTION

SELECTING YOUR SOFTFORMS® SWR WALL REVEAL SERIES OF ALUMINUM EXTRUSIONS

See Pitcon SOFTFORMS® extrusions from the models shown below.

SWR Model No.	Width	Depth
SWR-025-025	1/4" (6.4 mm)	1/4" (6.4 mm)
SWR-038-038	3/8" (9.5 mm)	3/8" (9.5 mm)
SWR-011-050	1/4" (6.4 mm)	1/2" (12.7 mm)
SWR-025-050	1/4" (6.4 mm)	1/2" (12.7 mm)
SWR-038-050	3/8" (9.5 mm)	1/2" (12.7 mm)
SWR-050-050	1/2" (12.7 mm)	1/2" (12.7 mm)
SWR-063-050	5/8" (15.9 mm)	1/2" (12.7 mm)
SWR-075-050	3/4" (19.1 mm)	1/2" (12.7 mm)
SWR-100-050	1" (25.4 mm)	1/2" (12.7 mm)
SWR-150-050	1 1/2" (38.1 mm)	1/2" (12.7 mm)
SWR-200-050	2" (50.8 mm)	1/2" (12.7 mm)
SWR-025-063	1/4" (6.4 mm)	5/8" (15.9 mm)
SWR-038-063	3/8" (9.5 mm)	5/8" (15.9 mm)
SWR-050-063	1/2" (12.7 mm)	5/8" (15.9 mm)
SWR-063-063	5/8" (15.9 mm)	5/8" (15.9 mm)
SWR-075-063	3/4" (19.1 mm)	5/8" (15.9 mm)
SWR-100-063	1" (25.4 mm)	5/8" (15.9 mm)
SWR-150-063	1 1/2" (38.1 mm)	5/8" (15.9 mm)
SWR-200-063	2" (50.8 mm)	5/8" (15.9 mm)
SWR-300-063	3" (76.2 mm)	5/8" (15.9 mm)

Special custom sizes are also available. Check with factory for availability and lead time.

West Pitcon Industries East

2090 Del Rio Way, Unit B Ontario, CA 91761 Phone: (909) 773-0091 Fax: (909) 773-0091

3330 W. Flower Street Phoenix, AZ 85017 Phone: (800) 637-7638 Fax: (602) 233-9400

6409 Rhode Island Ave. Riverdale, MD 20737 Phone: (888) 213-0952 Fax: (800) 897-3129

800 637-7638

PCS SERIES

CHANNEL SCREEN

Model No. PCS-xx-xxx
 PCS-xx-V-xxx (vented)

Pitcon SOFTFORMS® LLC
 6409 Rhode Island Avenue, Riverdale, MD 20737
 (888) 213-0952 (800) 637-7638
 (301) 927-1000 (602) 233-9100
 Fax: (301) 699-8690 Fax: (602) 233-9400

The extruded aluminum profile shall incorporate a continuous integral tie for surface contact to conventionally installed underlayment gypsum drywall. The fins shall be 7/8" wide and shall be tapered to the edge. A series of continuous grooves shall be extruded into the face of the fins to provide greater bonding surface. The extruded profiles shall be provided in 201 P1 Clear Anodized finish. Finish meets or exceeds AAMA standards for scratches and/or blemishes. Consult factory for optional finishes.

MATERIAL: Aluminum alloy.....6063 T5
 Finish.....Clear Anodized
 Thickness......050" nominal

NO SCALE TYPICAL SECTION

Model No.	Width Dim 'A'	Depth Dim 'B'
PCS-75-50	1/2" (12.7mm)	3/4" (19.1mm)
PCS-75-V-50	1/2" (12.7mm)	3/4" (19.1mm)
PCS-75-75	3/4" (19.1mm)	3/4" (19.1mm)
PCS-75-V-75	3/4" (19.1mm)	3/4" (19.1mm)
PCS-75-100	1" (25.4mm)	3/4" (19.1mm)
PCS-75-V-100	1" (25.4mm)	3/4" (19.1mm)
PCS-75-150	1 1/2" (38.1mm)	3/4" (19.1mm)
PCS-75-V-150	1 1/2" (38.1mm)	3/4" (19.1mm)
PCS-75-200	2" (50.8mm)	3/4" (19.1mm)
PCS-75-V-200	2" (50.8mm)	3/4" (19.1mm)
PCS-75-250	2 1/2" (63.5mm)	3/4" (19.1mm)
PCS-75-V-250	2 1/2" (63.5mm)	3/4" (19.1mm)
PCS-75-300	3" (76.2mm)	3/4" (19.1mm)
PCS-75-V-300	3" (76.2mm)	3/4" (19.1mm)
PCS-75-400	4" (101.6mm)	3/4" (19.1mm)
PCS-75-V-400	4" (101.6mm)	3/4" (19.1mm)
PCS-75-400	6" (152.4mm)	3/4" (19.1mm)
PCS-75-V-400	6" (152.4mm)	3/4" (19.1mm)
PCS-100-75	3/4" (19.1mm)	1" (25.4mm)
PCS-100-V-75	3/4" (19.1mm)	1" (25.4mm)
PCS-100-100	1" (25.4mm)	1" (25.4mm)
PCS-100-V-100	1" (25.4mm)	1" (25.4mm)

West Pitcon Industries East

2090 Del Rio Way, Unit B Ontario, CA 91761 Phone: (909) 773-0091 Fax: (909) 773-0091

3330 W. Flower Street Phoenix, AZ 85017 Phone: (800) 637-7638 Fax: (602) 233-9400

6409 Rhode Island Ave. Riverdale, MD 20737 Phone: (888) 213-0952 Fax: (800) 897-3129

800 637-7638

PCS-2PC. SERIES

TWO PIECE CONTROL SCREEN

Model No. PCS-xx-xxx
 PCS-xx-V-xxx (vented)

Pitcon SOFTFORMS® LLC
 6409 Rhode Island Avenue, Riverdale, MD 20737
 (888) 213-0952 (800) 637-7638
 (301) 927-1000 (602) 233-9100
 Fax: (301) 699-8690 Fax: (602) 233-9400

The extruded aluminum profile shall incorporate a continuous integral tie for surface contact to conventionally installed underlayment gypsum drywall. The fins shall be 7/8" wide and shall be tapered to the edge. A series of continuous grooves shall be extruded into the face of the fins to provide greater bonding surface. The extruded profiles shall be provided in 201 P1 Clear Anodized finish. Finish meets or exceeds AAMA standards for scratches and/or blemishes. Consult factory for optional finishes.

MATERIAL: Aluminum alloy.....6063 T5
 Finish.....Clear Anodized
 Thickness......050" nominal

NO SCALE TYPICAL SECTION

Model No.	Width Dim 'A'	Depth
PCS-75-25 2PC	1/4" (6.4mm)	3/4" (19.1mm)
PCS-75-50 2PC	1/2" (12.7mm)	3/4" (19.1mm)
PCS-75-75 2PC	3/4" (19.1mm)	3/4" (19.1mm)
PCS-75-100 2PC	1" (25.4mm)	3/4" (19.1mm)
PCS-75-150 2PC	1 1/2" (38.1mm)	3/4" (19.1mm)

STUD OR STRUCTURAL WALL BEHIND
 EXPANSION JOINT
 ADJUSTABLE CHANNEL SCREEN
 PLASTER

West Pitcon Industries East

2090 Del Rio Way, Unit B Ontario, CA 91761 Phone: (909) 773-0091 Fax: (909) 773-0091

3330 W. Flower Street Phoenix, AZ 85017 Phone: (800) 637-7638 Fax: (602) 233-9400

6409 Rhode Island Ave. Riverdale, MD 20737 Phone: (888) 213-0952 Fax: (800) 897-3129

800 637-7638

Special Conditions and Fabrication

Mitred Corners, Radius, Finishes, Inserts

Pitcon offers fabricated intersections made with six inch long legs, twelve inches overall. Longer legs are available as needed for special conditions. Intersections can be supplied in pieces for field assembly, or assembled at the factory. In addition, most of the SOFTFORMS profiles can be radiused to match field conditions. Optional finishes can be factory applied to your extrusions, such as clear or color anodizing, as well as a variety of paint colors. Decorative inserts can be supplied where architectural metal finishes such as polished or brushed chrome or brass are desired. All of these options are detailed below and on the other side of this page. Please contact the factory or your local sales representative for additional information.

Optional Finishes & Specifications

The following finishes are available subject to additional charges depending on the quantity ordered, and availability.

Painted in a high gloss enamel finish in a variety of colors
 Painted in a semi-gloss enamel finish in a variety of colors
 Painted in a Corlon® Fluoropolymer finish
 Black anodized finish
 Light, medium, or dark bronze Duraonod finish
 Other color anodized finishes

Finishes meet or exceed AAMA standards for scratches or blemishes.
 Corlon® is a registered trademark of PPG Industries, Inc.

SAMPLE SPECIFICATION:
 SOFTFORMS® extrusions as manufactured by Pitcon SOFTFORMS model no. _____ Material shall be of extruded aluminum, 6063 T-5 alloy, .050" nominal wall thickness with a factory primed finish. (Or as required). Lengths shall be secured to framing with screws or other approved fastener, at a minimum 12" o.c. But joints will be made with tight joints, and all corners neatly mitred. Excess joint compound or plaster is to be wiped from all visible surfaces immediately.

West Pitcon Industries East

2090 Del Rio Way, Unit B Ontario, CA 91761 Phone: (909) 773-0091 Fax: (909) 773-0091

3330 W. Flower Street Phoenix, AZ 85017 Phone: (800) 637-7638 Fax: (602) 233-9400

6409 Rhode Island Ave. Riverdale, MD 20737 Phone: (888) 213-0952 Fax: (800) 897-3129

800 637-7638



WALL REVEALS

SWR Series of Wall Reveals

Model No.	Width	Nominal Depth
SWR-025-025	1/4" (6.4 mm)	1/4" (6.4 mm)
SWR-038-038	3/8" (9.5 mm)	3/8" (9.5 mm)
SWR-013-050	1/8" (3.2 mm)	1/2" (12.7 mm)
SWR-025-050	1/4" (6.4 mm)	1/2" (12.7 mm)
SWR-038-050	3/8" (9.5 mm)	1/2" (12.7 mm)
SWR-050-050	1/2" (12.7 mm)	1/2" (12.7 mm)
SWR-063-050	5/8" (15.9 mm)	1/2" (12.7 mm)
SWR-075-050	3/4" (19.1 mm)	1/2" (12.7 mm)
SWR-100-050	1" (25.4 mm)	1/2" (12.7 mm)
SWR-150-050	1-1/2" (38.1 mm)	1/2" (12.7 mm)
SWR-200-050	2" (50.8 mm)	1/2" (12.7 mm)
SWR-075-150	3/4" (19.1 mm)	1-1/2" (38.1 mm)
SWR-150-100	1-1/2" (38.1 mm)	1" (25.4 mm)
SWR-150-150	1-1/2" (38.1 mm)	1-1/2" (38.1 mm)

For Drywall and Direct Applied EIFS Applications



Model No.	Width	Nominal Depth
SWR-013-063	1/8" (3.2 mm)	5/8" (15.9 mm)
SWR-025-063	1/4" (6.4 mm)	5/8" (15.9 mm)
SWR-038-063	3/8" (9.5 mm)	5/8" (15.9 mm)
SWR-050-063	1/2" (12.7 mm)	5/8" (15.9 mm)
SWR-063-063	5/8" (15.9 mm)	5/8" (15.9 mm)
SWR-075-063	3/4" (19.1 mm)	5/8" (15.9 mm)
SWR-100-063	1" (25.4 mm)	5/8" (15.9 mm)
SWR-150-063	1-1/2" (38.1 mm)	5/8" (15.9 mm)
SWR-200-063	2" (50.8 mm)	5/8" (15.9 mm)



STR Series of Trim Reveals


Model No.	Width	Nominal Depth
STR-025-025	1/4" (6.4 mm)	1/4" (6.4 mm)
STR-038-038	3/8" (9.5 mm)	3/8" (9.5 mm)
STR-025-050	1/4" (6.4 mm)	1/2" (12.7 mm)
STR-038-050	3/8" (9.5 mm)	1/2" (12.7 mm)
STR-050-050	1/2" (12.7 mm)	1/2" (12.7 mm)
STR-063-050	5/8" (15.9 mm)	1/2" (12.7 mm)
STR-075-050	3/4" (19.1 mm)	1/2" (12.7 mm)
STR-100-050	1" (25.4 mm)	1/2" (12.7 mm)
STR-150-050	1-1/2" (38.1 mm)	1/2" (12.7 mm)
STR-200-050	2" (50.8 mm)	1/2" (12.7 mm)

Model No.	Width	Nominal Depth
STR-025-063	1/4" (6.4 mm)	5/8" (15.9 mm)
STR-038-063	3/8" (9.5 mm)	5/8" (15.9 mm)
STR-050-063	1/2" (12.7 mm)	5/8" (15.9 mm)
STR-063-063	5/8" (15.9 mm)	5/8" (15.9 mm)
STR-075-063	3/4" (19.1 mm)	5/8" (15.9 mm)
STR-100-063	1" (25.4 mm)	5/8" (15.9 mm)
STR-150-063	1-1/2" (38.1 mm)	5/8" (15.9 mm)
STR-200-063	2" (50.8 mm)	5/8" (15.9 mm)
STR-300-063 (custom)	3" (76.2 mm)	5/8" (15.9 mm)
STR-400-063 (custom)	4" (101.6 mm)	5/8" (15.9 mm)



ST/STF Series of Edge Trims



Model No.	Depth	(STF Represents Flex Trim Version)
ST-050 (STF)	1/2" (12.7 mm)	
ST-063 (STF)	5/8" (15.9 mm)	
ST-100 (STF)	1" (25.4 mm)	
ST-125 (STF)	1-1/4" (31.8 mm)	



SWR-U Series of 'U' Trim Reveals

Model No.	Width	Nominal Depth
SWR-025U-025	1/4" (6.4 mm)	1/4" (6.4 mm)
SWR-038U-038	3/8" (9.5 mm)	3/8" (9.5 mm)
SWR-013U-050	1/8" (3.2 mm)	1/2" (12.7 mm)
SWR-025U-050	1/4" (6.4 mm)	1/2" (12.7 mm)
SWR-038U-050	3/8" (9.5 mm)	1/2" (12.7 mm)
SWR-050U-050	1/2" (12.7 mm)	1/2" (12.7 mm)
SWR-063U-050	5/8" (15.9 mm)	1/2" (12.7 mm)
SWR-075U-050	3/4" (19.1 mm)	1/2" (12.7 mm)
SWR-100U-050	1" (25.4 mm)	1/2" (12.7 mm)
SWR-150U-050	1-1/2" (38.1 mm)	1/2" (12.7 mm)
SWR-200U-050	2" (50.8 mm)	1/2" (12.7 mm)


Model No.	Width	Nominal Depth
SWR-013U-063	1/8" (3.2 mm)	5/8" (15.9 mm)
SWR-025U-063	1/4" (6.4 mm)	5/8" (15.9 mm)
SWR-038U-063	3/8" (9.5 mm)	5/8" (15.9 mm)
SWR-050U-063	1/2" (12.7 mm)	5/8" (15.9 mm)
SWR-063U-063	5/8" (15.9 mm)	5/8" (15.9 mm)
SWR-075U-063	3/4" (19.1 mm)	5/8" (15.9 mm)
SWR-100U-063	1" (25.4 mm)	5/8" (15.9 mm)
SWR-150U-063	1-1/2" (38.1 mm)	5/8" (15.9 mm)
SWR-200U-063	2" (50.8 mm)	5/8" (15.9 mm)



For Drywall and Direct
Applied EIFS Applications

STBT Series of Bevel Trims


Model No.	Width	Depth
ST-030B-050	5/16" (7.9 mm)	1/2" (12.7 mm)
ST-063B-063	5/8" (15.9 mm)	5/8" (15.7 mm)
ST-144C-150	1" (25.4 mm)	1-1/2" (38.1 mm)

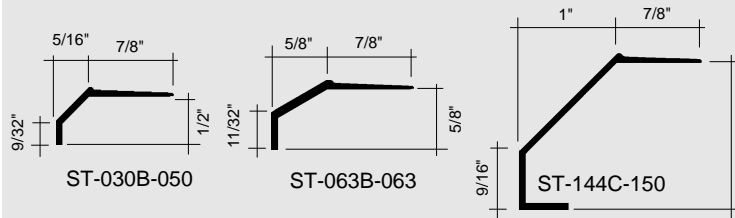


WALL REVEALS

SWR-V Series of 'V' Reveals

Model No.	Width	Depth
SWR-075V-050	3/4" (19.1mm)	9/32" (7.14 mm)
SWR-100V-050	1" (25.4 mm)	13/32" (10.3 mm)
SWR-063VS-050	5/8" (15.9 mm)	11/32" (8.7 mm)

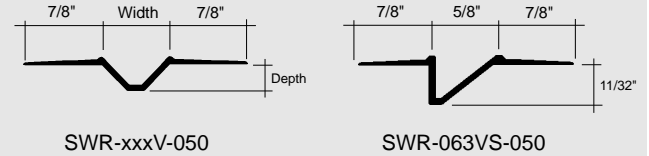


SWR-CC Series of Custom Width Wall Reveals



Model No.	Width	Nominal Depth
SWR-300-050-CC	3" (76.2 mm)	1/2" (12.7 mm)
SWR-400-050-CC	4" (101.6 mm)	1/2" (12.7 mm)
SWR-300-063-CC	3" (76.2 mm)	5/8" (15.8 mm)
SWR-400-063-CC	4" (101.6 mm)	5/8" (15.8 mm)

Custom Fabricated Parts. Other Custom Sizes are Available. Please Consult Factory.

SWR-CD Series of Custom Depth Wall Reveals




Model No.	Width	Depth
SWR-200-200-CD	2" (50.8 mm)	2" (50.8 mm)
SWR-300-300-CD	3" (76.2 mm)	3" (76.2 mm)
SWR-400-400-CD	4" (101.6 mm)	4" (101.6 mm)

Custom Fabricated Parts. Other Custom Sizes are Available. Please Consult Factory.

SWR/STR Series of Hanging Track

Model No.	Width	Depth
SWR-050-HT	1/2" (12.7 mm)	1/2" (12.7 mm)
SWR-118-HT	1-3/16" (30.2 mm)	1/2" (12.7 mm)
STR-063-HT	1-5/8" (41.3 mm)	5/8" (15.9 mm)
SWX-025 fabric tuck	1/4" (6.4 mm)	7/16" (11.1 mm)

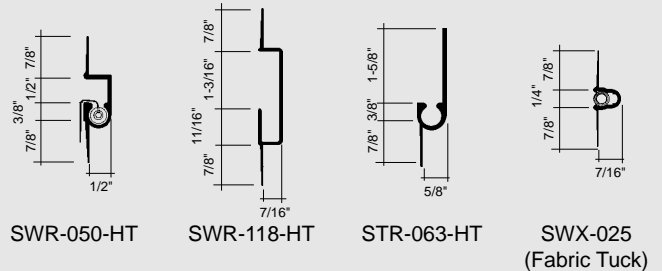


SWC Series of Wall Caps

Model No.	Width	Stud & Drywall Requirements
SWC-212-2	3-5/8" (92.1 mm)	2-1/2" stud - 1/2" DW
SWC-212-8	3-7/8" (98.4 mm)	2-1/2" stud - 5/8" DW
SWC-358-2	4-5/8" (117.5 mm)	3-5/8" stud - 1/2" DW
SWC-358-8	5" (127.0 mm)	3-5/8" stud - 5/8" DW

Other Custom Sizes are Available. Please Consult Factory.


SBR-212-063 2-1/2" (127.0 mm) 5/8" (15.7 mm) deep

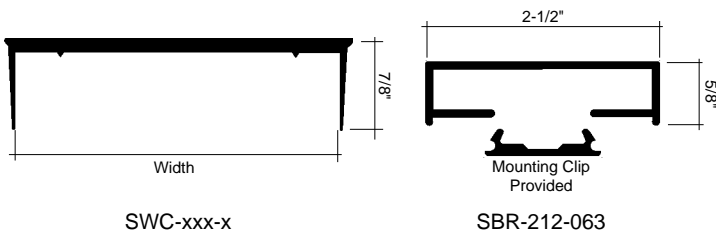

Wall Caps with Reveals

Model No.	Width	Stud & Drywall Requirements
SWC-212R-2	3-5/8" (92.1 mm)	2-1/2" stud - 1/2" DW
SWC-212R-8	3-7/8" (98.4 mm)	2-1/2" stud - 5/8" DW
SWC-358R-2	4-3/4" (120.7 mm)	3-5/8" stud - 1/2" DW
SWC-358R-8	5" (127.0 mm)	3-5/8" stud - 5/8" DW

Custom Fabricated Parts. Other Custom Sizes are Available. Please Consult Factory.

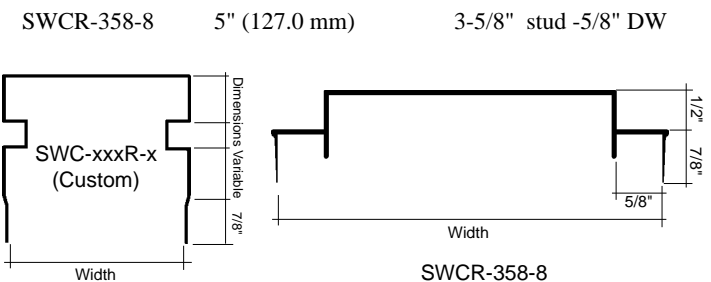


BULLNOSES & CORNERS

SB Series of Taping Bullnoses

Model No.	Width	Stud & Drywall Requirements
SB-158-8	3" (76.2 mm)	1-5/8" stud -5/8" DW
SB-212-2	3-5/8" (92.01 mm)	2-1/2" stud -1/2" DW
SB-212-8	3-7/8" (98.2 mm)	2-1/2" stud -5/8" DW
SB-358-2	4-3/4" (120.6 mm)	3-5/8" stud -1/2" DW
SB-358-8	5" (127 mm)	3-5/8" stud -5/8" DW
SB-400-8	5-3/8" (136.5 mm)	4" stud -5/8" DW
SB-600-8	7-3/8" (187 mm)	6" stud -5/8" DW

Custom Sizes are Available. Please Consult Factory.

Taping Bullnose



SB-xxx-x


STB Series of Snap Bullnoses

STB Model No.	Diameter	Base Number	End Cap Number
STB-267	3/4" (19.1 mm)	SC-526	
STB-328	1" (25.4 mm)	SC-526	EC-323
STB-200	1-1/2" (38.1 mm)	SC-443	EC-204
STB-201	2" (50.8 mm)	SC-443	EC-205
STB-202	3" (76.2 mm)	SC-540	EC-206
STB-210	4" (101.6 mm)	SC-458	EC-207
STB-285	4-1/2" (114.3 mm)	SC-458	EC-238
STB-259	5-1/4" (133.4 mm)	SC-509	EC-232
STB-212	6" (152.4 mm)	SC-509	EC-209


Note: Limited Availability on all Sizes. Please Consult Factory Prior to Ordering.

SSB Series of Snap Bullnoses

SSB Model No.	Width O/A	Stud & Drywall Requirements
SSB-212-8	4" (101.6 mm)	2-1/2" stud -5/8" DW
SSB-358-8	5-1/8" (130.2 mm)	3-5/8" stud -5/8" DW
SSB-600-8	6" (152.4 mm)	4" stud -5/8" DW




STB-xxx



SSB-xxx-x

SO Series of Outside Corners


Model No.	Radius
SO-9-050	1/2" (12.7 mm)
SO-9-063	5/8" (15.9 mm)
SO-9-075	3/4" (19.1 mm)
SO-9-100	1" (25.4 mm)
SO-9-150	1-1/2" (38.1 mm)
SO-9-200	2" (50.8 mm)
SO-9-250	2-1/2" (63.5 mm)
SO-9-300	3" (76.2 mm)
SO-9-400	4" (101.6 mm)



Custom Sizes are Available. Please Consult Factory.

SI Series of Inside Corners


Model No.	Radius
SI-9-075	3/4" (19.1 mm)
SI-9-100	1" (25.4 mm)
SI-9-150	1-1/2" (38.1 mm)
SI-9-200	2" (50.8 mm)
SI-9-250	2-1/2" (63.5 mm)
SI-9-300	3" (76.2 mm)
SI-9-400	4" (101.6 mm)



Custom Sizes are Available. Please Consult Factory.

SO-HS Series of High Strength Corners



Model No.	Shoulder Width	O/A Width
SO-HSN-90	3/8" (9.5 mm)	1-1/4" (31.8 mm)
SO-HSE-90	1-1/4" (31.8 mm)	2-1/8" (53.9 mm)
SO-ER-90	1-1/4" (31.8 mm)	2-5/16" (58.8 mm)

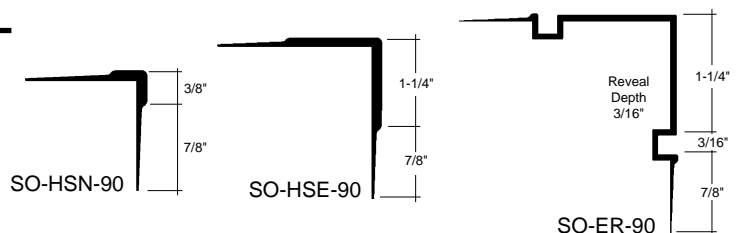


CORNERS & CEILING TRIMS

SO Series of Special Use Corners


Model No.	Shoulder Width	O/A Width
SO-45-A (45 deg.)	2" (50.8 mm)	2-7/8" (73 mm)
SO-60-A (60 deg.)	2" (50.8 mm)	2-7/8" (73 mm)
<i>Custom Sizes are Available. Please Consult Factory.</i>		
SOT-9-063	N/A	N/A
SO-9-075C	N/A	N/A
SO-R060-90	3/8" (9.5 mm)	1-1/4" (31.8 mm)

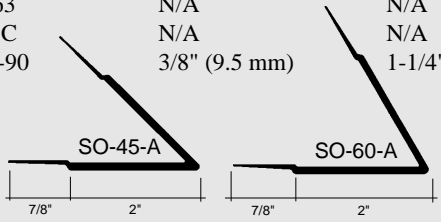SOT-9-063
(Corner Trim
with 5/8" rad)



SO-9-075C
(Chamfered
Corner)




SO-R060-90
(Fabric Tuck)


SCS Series of Stepped Corners

Model Number	Reveal Depth	Drywall
SCS-2X(050-050)	1/2" (12.7 mm)	1/2"
SCS-2X(063-063)	5/8" (15.9 mm)	5/8"
SCS-2X(100-100)	1" (25.4 mm)	1/2" (2 layers)
SCS-3X(050-050)	1/2" (12.7 mm)	1/2"
SCS-3X(063-063)	5/8" (15.9 mm)	5/8"
SCS-3X(100-100)	1" (25.4 mm)	1/2" (1-2 layers)
SCS-4X(033-050)	1/3" x 1/2"	1/2" or 5/8"
SCS-3X custom	2" (50.8 mm) typ	1/2" or 5/8"


Custom Sizes are Available for all of the Above Configurations. Please Consult Factory.




SCS-4X(033-050)



SCS-3X(xxx-xxx)




SCS-2X(xxx-xxx)




SCS-3X (custom)

SWZ Series of Ceiling Steps

Model Number	Reveal Depth	Drywall
SWZ-050	1/2" (12.7 mm)	1/2"
SWZ-063	5/8" (15.9 mm)	5/8"
SWZ-100	1" (25.4 mm)	1/2" (2 layers)
SWZ-150	1-1/2" (38.1 mm)	1/2" (3 layers)
SWZ-200 (custom)	2" (50.8 mm) typ	Custom
SWZ-300 (custom)	3" (76.2 mm) typ	Custom




SWZ-xxx




SWS-2X(050-200) Custom

SWS Series of Ceiling Steps

Model Number	Reveal Depth	Drywall
SWS-2X(050-200) custom	1/2" x 2"	1/2" (2 layers)
SWS-3X(033-050)	1/3" x 1/2"	1/2" (2 layers)
SWS-9-063	5/8" (15.9 mm)	5/8"
SWS-9-100	1" (25.4 mm)	1/2" (2 layers)

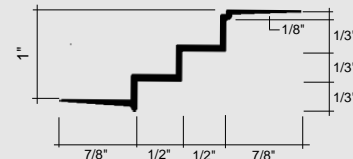


SWS-3X(033-050)




SWS-9-xxx

MISC Assorted Trims


Model No.	Description (See Catalog for sizes)
STA-075	Ceiling Transition Trim (Gypsum/Acoustical)
SGC-050C	Gypsum Trim Cap
SWR-075C-050	Ceiling Reveal for Acoustical ceiling
SCR-075-050	Ceiling Reveal for Drywall ceiling
SWR-075DA-050	Ceiling Transitional Reveal




STA-075



SGC-050C



SWR-075C-050



SCR-075-050


SWR-075DA-050

(See Catalog for sizes)

WALL BASES

SWB Series of Wall Bases




Model No.	Height	Nominal Depth
SWB-300-2	3" (76.2 mm)	1/2" (12.7 mm)
SWB-300-8	3" (76.2 mm)	5/8" (15.7 mm)
SWB-400-2	4" (101.6 mm)	1/2" (12.7 mm)
SWB-400-8	4" (101.6 mm)	5/8" (15.7 mm)
SWBR-300-2 custom	3-1/16" (77.8 mm)	1/2" (12.7 mm)
SWBR-300-8 custom	3-1/16" (77.8 mm)	5/8" (15.7 mm)
SWBR-400-2 custom	4-1/16" (103.2 mm)	1/2" (12.7 mm)
SWBR-400-8 custom	4-1/16" (103.2 mm)	5/8" (15.7 mm)

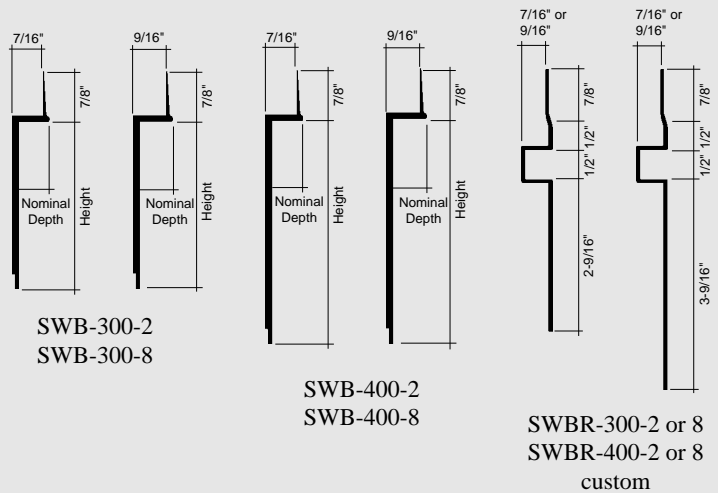


Ceiling Accessories

PT Series of Perimeter Trims


PT Model	Height at Face	Minimum Radii
PT-2	2-1/8" (53.9 mm)	12" Single Radius
PT-4	3-7/8" (98.4 mm)	12" Single Radius
PT-6	5-25/32" (146.8 mm)	12" Single Radius
PT-8	7-13/16" (198.4 mm)	12" Single Radius
PT-10	9-13/16" (249.2 mm)	24" Single Radius
PT-12	12" (304.8 mm)	24" Single Radius

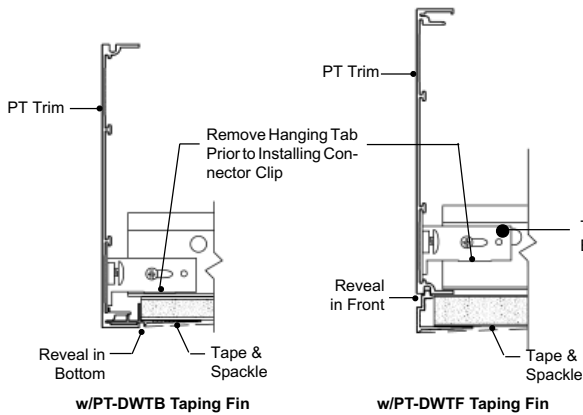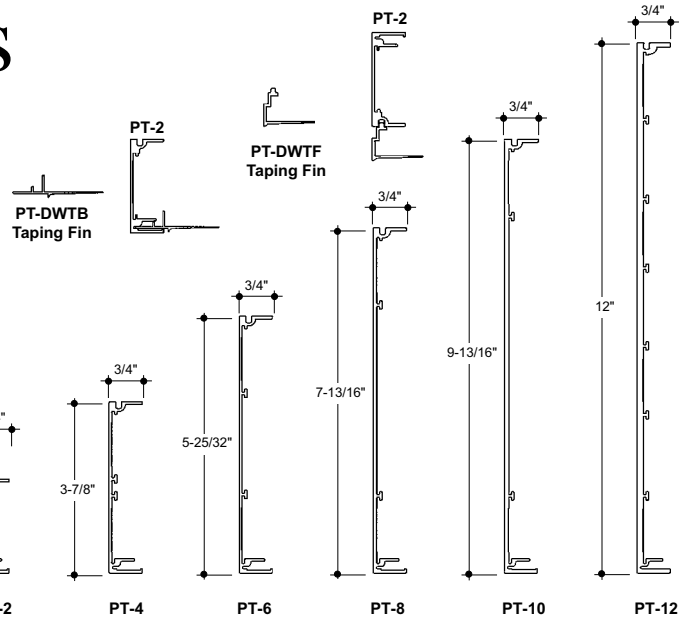



Typical Mitered Corner Provided with 12" Legs

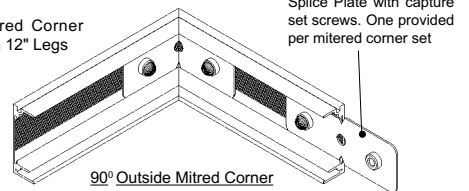

Series 500 Ceiling Grids



SERIES 500 Profile

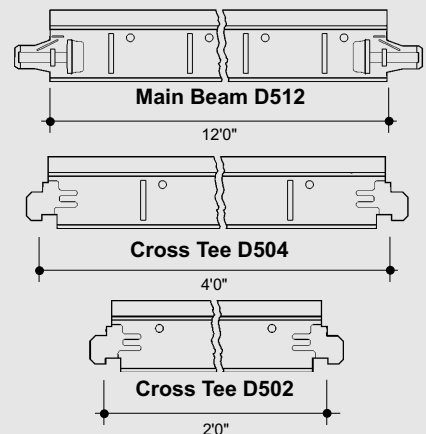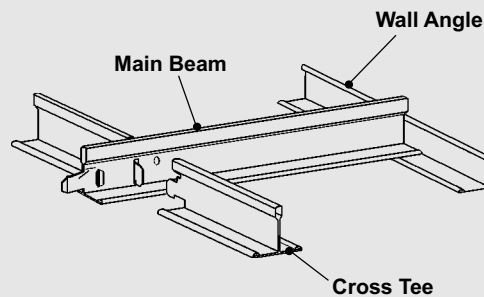


CONVENTIONAL PLASTER

PCS Series of Channel Screeds


Model No.	Width	Depth
PCS-75-50	1/2" (12.7mm)	3/4" (19.1mm)
PCS-75-V-50	1/2" (12.7mm)	3/4" (19.1mm)
PCS-75-75	3/4" (19.1mm)	3/4" (19.1mm)
PCS-75-V-75	3/4" (19.1mm)	3/4" (19.1mm)
PCS-75-100	1" (25.4mm)	3/4" (19.1mm)
PCS-75-V-100	1" (25.4mm)	3/4" (19.1mm)
PCS-75-150	1-1/2" (38.1mm)	3/4" (19.1mm)
PCS-75-V-150	1-1/2" (38.1mm)	3/4" (19.1mm)
PCS-75-200	2" (50.8mm)	3/4" (19.1mm)
PCS-75-V-200	2" (50.8mm)	3/4" (19.1mm)
PCS-75-250	2-1/2" (63.5mm)	3/4" (19.1mm)
PCS-75-V-250	2-1/2" (63.5mm)	3/4" (19.1mm)
PCS-75-300	3" (76.2mm)	3/4" (19.1mm)
PCS-75-V-300	3" (76.2mm)	3/4" (19.1mm)
PCS-75-400	4" (101.6mm)	3/4" (19.1mm)
PCS-75-V-400	4" (101.6mm)	3/4" (19.1mm)
PCS-75-600	6" (152.4mm)	3/4" (19.1mm)
PCS-75-V-600	6" (152.4mm)	3/4" (19.1mm)
PCS-100-100	1" (25.4mm)	1" (25.4mm)
PCS-100-V-100	1" (25.4mm)	1" (25.4mm)

FPM Series of 'F' Moldings

Model No.	Width	Depth
FPM-75-50	1/2" (12.7mm)	3/4" (19.1mm)
FPM-75-V-50	1/2" (12.7mm)	3/4" (19.1mm)
FPM-75-75	3/4" (19.1mm)	3/4" (19.1mm)
FPM-75-V-75	3/4" (19.1mm)	3/4" (19.1mm)
FPM-75-100	1" (25.4mm)	3/4" (19.1mm)
FPM-75-V-100	1" (25.4mm)	3/4" (19.1mm)
FPM-75-150	1-1/2" (38.1mm)	3/4" (19.1mm)
FPM-75-V-150	1-1/2" (38.1mm)	3/4" (19.1mm)
FPM-75-200	2" (50.8mm)	3/4" (19.1mm)
FPM-75-V-200	2" (50.8mm)	3/4" (19.1mm)
FPM-100-100	1" (25.4mm)	1" (25.4mm)
FPM-100-V-100	1" (25.4mm)	1" (25.4mm)




PCS-SERIES
(PCS-xxx-xxx) un-vented
(PCS-xxx-V-xxx) vented
("V" Indicates Vented)



FPM-SERIES
(FPM-xxx-xxx) un-vented
(FPM-xxx-V-xxx) vented
("V" Indicates Vented)

TRM Series of 'T' Moldings


Model No.	Width	Depth
TRM-75-75	3/4" (19.1mm)	3/4" (19.1 mm)
TRM-75-V-75	3/4" (19.1mm)	3/4" (19.1 mm)
TRM-75-100	1" (25.4 mm)	3/4" (19.1 mm)
TRM-75-V-100	1" (25.4 mm)	3/4" (19.1 mm)
TRM-75-150	1-1/2" (38.1 mm)	3/4" (19.1 mm)
TRM-75-V-150	1-1/2" (38.1 mm)	3/4" (19.1 mm)
TRM-75-200	2" (50.8 mm)	3/4" (19.1 mm)
TRM-75-V-200	2" (50.8 mm)	3/4" (19.1mm)
TRM-100-75	3/4" (19.1 mm)	1" (25.4 mm)
TRM-100-V-75	3/4" (19.1mm)	1" (25.4 mm)



TRM-SERIES
(TRM-xxx-xxx) un-vented
(TRM-xxx-V-xxx) vented
("V" Indicates Vented)

DS Series of Drip Screeds


Model No.	Width Flange	Width Reveal
DS-875-875	7/8" (22.2mm)	7/8" (22.2mm)
DS-875-V-875	7/8" (22.2mm)	7/8" (22.2mm)
DS-875-300	7/8" (22.2mm)	3" (76.2mm)
DS-875-V-300	7/8" (22.2mm)	3" (76.2mm)



DS-SERIES
(DS-xxx-xxx) un-vented
(DS-xxx-V-xxx) vented
("V" Indicates Vented)

JPM Series of J- Moldings


Model No.	Depth
JPM-75	3/4" (19.1mm)
JPM-100	1" (25.4 mm)



JPM-SERIES
(JPM-xxx)

PCS Series of Control Screeds

Model No.	Width	Depth
PCS-75-25 2PC.	1/4" (6.4 mm)	3/4" (19.1mm)
PCS-75-50 2PC.	1/2" (12.7 mm)	3/4" (19.1mm)
PCS-75-75 2PC.	3/4" (19.1mm)	3/4" (19.1mm)
PCS-75-100 2PC.	1" (25.4 mm)	3/4" (19.1mm)
PCS-75-150 2PC.	1-1/2" (38.1 mm)	3/4" (19.1mm)




PCS-SERIES
(PCS-xxx-xxx 2pc)
±1/4" Movement Typical


CONVENTIONAL PLASTER

MISC Assorted Moldings


Model Number		Reveal Depth	Reveal Width
XPM-75-75	Corner Molding	3/4" (19.1mm)	3/4" (19.1mm)
PCM-75	Corner Molding	3/4" (19.1mm) ground	3/16" (4.8 mm) lip
WRM-75-75	"W" Molding	3/4" (19.1mm)	3/4" (19.1mm) lip
PRZ-75-75	"W" Molding	3/4" (19.1mm) ground	3/16" (4.8 mm) lip
PCS-75-25/25	Channel Screed	1/4" (6.4 mm)	3/16" (4.8 mm) lips
FCM-75	Fascia Moulding	3/4" (19.1mm) ground	3/16" (4.8 mm) lip
WPM-75-300	Soffit Reveal	3" (76.2 mm)	3/16" (4.8 mm) lip




XPM-75-75




PCM-75




WRM-75-75




PRZ-75-75



PCS-75-25/25



FCM-75

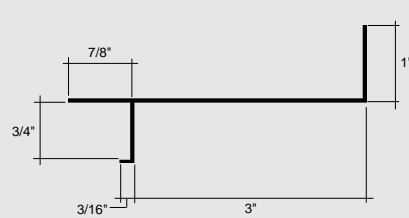


WPM-75-300

Venting

Most plaster moldings are available vented to allow for unrestricted air flow. All vent slots are 1/8" wide by 1" long, spaced 1-1/2" on center lengthwise. Multiple rows of vents are spaced laterally, 1/2" on center. Each lengthwise row of vent slots provides approximately one square inch of venting per lineal foot. Note: the "V" designation in the model numbers indicates vented availability.

VENTING CHARACTERISTICS


Reveal Width	No. of Slots	Vented Area/ LF (approx.)	Percentage of Area Vented (approx.)
1/2"	1	1" square	15.0% of Square Footage
3/4"	1	1" square	12.5% of Square Footage
1"	1	1" square	9.4% of Square Footage
1-1/2"	2	2" square	12.5% of Square Footage
2"	3	3" square	14.1% of Square Footage
3"	5	5" square	14.3% of Square Footage
4"	5	5" square	10.4% of Square Footage

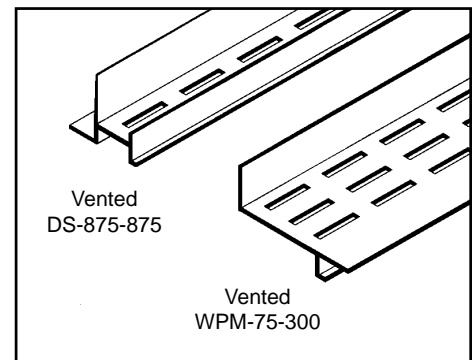

POLY-MOD/ONE-COAT

DCS Series of Channel Screeds


Model No.	Width	Depth
DCS-50-50	1/2" (12.7 mm)	1/2" (12.7 mm)
DCS-50-V-50	1/2" (12.7 mm)	1/2" (12.7 mm)
DCS-50-75	3/4" (19.1mm)	1/2" (12.7 mm)
DCS-50-V-75	3/4" (19.1mm)	1/2" (12.7 mm)
DCS-50-100	1" (25.4 mm)	1/2" (12.7 mm)
DCS-50-V-100	1" (25.4 mm)	1/2" (12.7 mm)
DCS-50-150	1-1/2" (38.1mm)	1/2" (12.7mm)
DCS-50-V-150	1-1/2" (38.1mm)	1/2" (12.7mm)
DCS-50-200	2" (50.8mm)	1/2" (12.7mm)
DCS-50-V-200	2" (50.8mm)	1/2" (12.7mm)
DCS-50-300	3" (76.2mm)	1/2" (12.7mm)
DCS-50-V-300	3" (76.2mm)	1/2" (12.7mm)
DCS-50-400	4" (101.6mm)	1/2" (12.7mm)
DCS-50-V-400	4" (101.6mm)	1/2" (12.7mm)
<hr/>		
DCS-625-50	1/2" (12.7mm)	5/8" (15.9mm)
DCS-625-V-50	1/2" (12.7mm)	5/8" (15.9mm)
DCS-625-75	3/4" (19.1mm)	5/8" (15.9mm)
DCS-625-V-75	3/4" (19.1mm)	5/8" (15.9mm)
DCS-625-100	1" (25.4mm)	5/8" (15.9mm)
DCS-625-V-100	1" (25.4mm)	5/8" (15.9mm)
DCS-625-150	1-1/2" (38.1mm)	5/8" (15.9mm)
DCS-625-V-150	1-1/2" (38.1mm)	5/8" (15.9mm)
DCS-625-200	2" (50.8mm)	5/8" (15.9mm)
DCS-625-V-200	2" (50.8mm)	5/8" (15.9mm)
DCS-625-300	3" (76.2mm)	5/8" (15.9mm)
DCS-625-V-300	3" (76.2mm)	5/8" (15.9mm)
DCS-625-400	4" (101.6mm)	5/8" (15.9mm)
DCS-625-V-400	4" (101.6mm)	5/8" (15.9mm)



DCS-SERIES
 (DCS-xxx-xxx) un-vented
 (DCS-xxx-V-xxx) vented
 ("V" Indicates Vented)

FDM Series of 'F' Moldings


Model No.	Width	Depth
FDM-50-50	1/2" (12.7mm)	1/2" (12.7mm)
FDM-50-V-50	1/2" (12.7mm)	1/2" (12.7mm)
FDM-50-75	3/4" (19.1mm)	1/2" (12.7mm)
FDM-50-V-75	3/4" (19.1mm)	1/2" (12.7mm)
FDM-50-100	1" (25.4mm)	1/2" (12.7mm)
FDM-50-V-100	1" (25.4mm)	1/2" (12.7mm)
FDM-50-150	1-1/2" (38.1mm)	1/2" (12.7mm)
FDM-50-V-150	1-1/2" (38.1mm)	1/2" (12.7mm)
FDM-50-200	2" (50.8mm)	1/2" (12.7mm)
FDM-50-V-200	2" (50.8mm)	1/2" (12.7mm)
<hr/>		
FDM-625-50	1/2" (12.7mm)	5/8" (15.9mm)
FDM-625-V-50	1/2" (12.7mm)	5/8" (15.9mm)
FDM-625-75	3/4" (19.1mm)	5/8" (15.9mm)
FDM-625-V-75	3/4" (19.1mm)	5/8" (15.9mm)
FDM-625-100	1" (25.4mm)	5/8" (15.9mm)
FDM-625-V-100	1" (25.4mm)	5/8" (15.9mm)
FDM-625-150	1-1/2" (38.1mm)	5/8" (15.9mm)
FDM-625-V-150	1-1/2" (38.1mm)	5/8" (15.9mm)
FDM-625-200	2" (50.8mm)	5/8" (15.9mm)
FDM-625-V-200	2" (50.8mm)	5/8" (15.9mm)



FDM-SERIES
 (FDM-xxx-xxx) un-vented
 (FDM-xxx-V-xxx) vented
 ("V" Indicates Vented)

TDM Series of 'T' Moldings


Model No.	Width	Depth
TDM-50-50	1/2" (12.7mm)	1/2" (12.7mm)
TDM-50-V-50	1/2" (12.7mm)	1/2" (12.7mm)
TDM-50-75	3/4" (19.1mm)	1/2" (12.7mm)
TDM-50-V-75	3/4" (19.1mm)	1/2" (12.7mm)
TDM-50-100	1" (25.4mm)	1/2" (12.7mm)
TDM-50-V-100	1" (25.4mm)	1/2" (12.7mm)
TDM-50-150	1-1/2" (38.1mm)	1/2" (12.7mm)
TDM-50-V-150	1-1/2" (38.1mm)	1/2" (12.7mm)
<hr/>		
TDM-625-75	3/4" (19.1mm)	5/8" (15.9mm)
TDM-625-V-75	3/4" (19.1mm)	5/8" (15.9mm)
TDM-625-100	1" (25.4mm)	5/8" (15.9mm)
TDM-625-V-100	1" (25.4mm)	5/8" (15.9mm)
TDM-625-150	1-1/2" (38.1mm)	5/8" (15.9mm)
TDM-625-V-150	1-1/2" (38.1mm)	5/8" (15.9mm)



TDM-SERIES
 (TDM-xxx-xxx) un-vented
 (TDM-xxx-V-xxx) vented
 ("V" Indicates Vented)

JDM Series of 'J' Moldings


Model No.	Depth
JDM-50	1/2" (12.7mm)
JDM-625	5/8" (15.9mm)



JDM-SERIES
 (JDM-xxx)

DCS Series of Control Screeds

Model No.	Width	Depth
DCS-2-50-75	3/4" (19.1mm)	1/2" (12.7mm)
DCS-2-50-100	1" (25.4mm)	1/2" (12.7mm)
DCS-2-50-150	1-1/2" (38.1mm)	1/2" (12.7mm)
DCS-2-50-200	2" (50.8mm)	1/2" (12.7mm)



DCS-SERIES
 (DCS-xxx-xxx 2pc)


SPECIAL CONDITIONS

Custom Mitred Corners, Finishing


Pittcon offers fabricated intersections made with six inch long legs, twelve inches overall. Longer legs are available as needed for special conditions. Intersections can be supplied in pieces for field assembly, or assembled at the factory. Optional finishes can be factory applied to your extrusions, such as clear or color anodizing, as well as a variety of paint colors. Decorative inserts can be supplied where architectural metal finishes such as polished or brushed chrome or brass are desired. All of these options are detailed below and on the other side of this page. Please contact the factory or your local sales representative for additional information.

Softforms® Drywall Moldings


Condition #18
X-Mitre

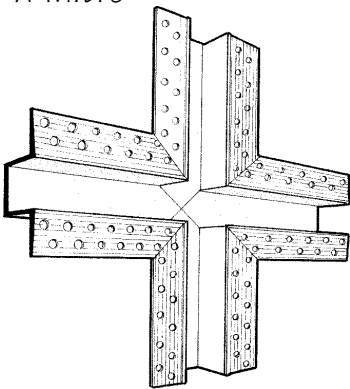


Condition #17
Tee-Mitre




Condition #21 Tee
Mixed-Mitre

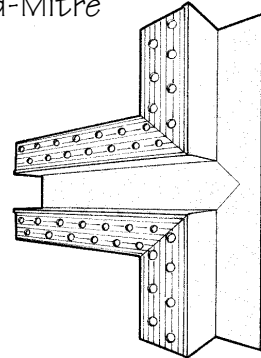


Softforms® Plaster Moldings

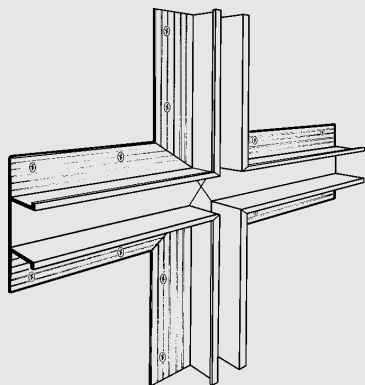

Condition #18
X-Mitre

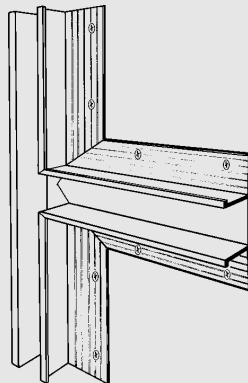

Condition #17
T-Mitre

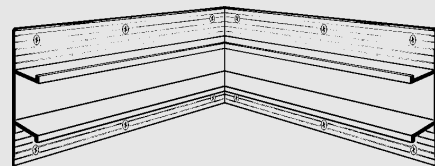

Condition #24
Inside-Mitre

Optional Finishes

The following finishes are available subject to additional charges depending on the quantity ordered, and availability.

- Painted in a high gloss enamel finish in a variety of colors
- Painted in a semi-gloss enamel finish in a variety of colors
- Painted in a Coraflon® fluoropolymer finish
- Black anodized finish
- Light, medium, or dark bronze Duranodic finish
- Other color anodized finishes

All paint finishes meet or exceed AAMA standards for scratches or blemishes.

Coraflon® is a registered trademark of PPG Industries, Inc.


SPECIAL CONDITIONS

Inside, Outside, Circular/Arched Curving, Bridge & Channel Inserts


Many new construction and renovation projects incorporate radiused wall conditions. To accommodate these conditions Pittcon has perfected the art of extrusion 'radiusing'. We can roll-form most of our wall and trim reveal profiles to match your needs. The four possible radius directions: Inside, Outside, Circular/Arched, are shown below, using an 'SWR' and a "PCS" extrusion for examples. The shapes can be supplied in lengths up to 8'. Not all shapes are equally easy to radius, so please consult the factory for your requirements. Reveal inserts can be supplied in a variety of metals and finishes, including wood. Shown below are the two variations normally supplied. In addition to their decorative value, both methods act equally well as fabric tucks for vinyl wall coverings.

Soffforms® Drywall Moldings


Condition #27
Inside Radius




Condition #28
Outside Radius




Condition #29
Circular/Arched

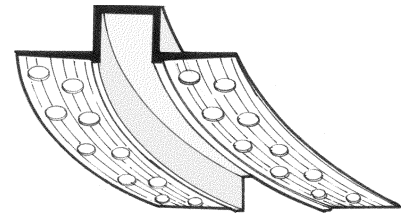


Soffforms® Plaster Moldings

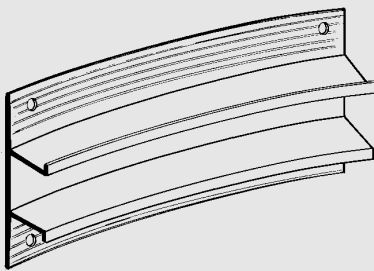


Condition #27
Inside Radius



Condition #28
Outside Radius

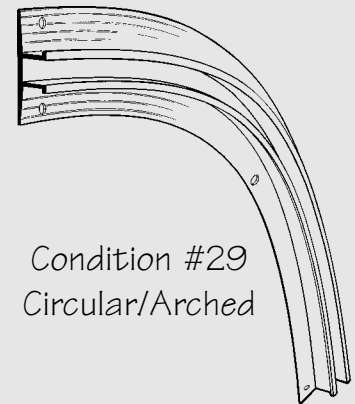

Condition #29
Circular/Arched

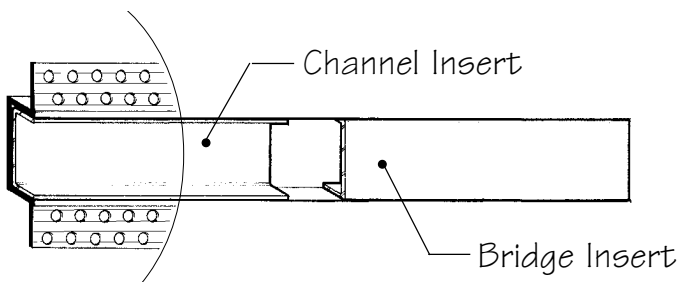

Channel & Bridge Inserts

- In a brushed or polished Nevamar Puremetals® Chrome finish
- In a brushed or polished Nevamar Puremetals® Brass finish
- Painted in a high gloss enamel finish in a variety of colors
- Painted in a semi-gloss enamel finish in a variety of colors
- Painted in a Coraflox® fluoropolymer finish
- Black anodized finish
- Light, medium, or dark bronze Duranodic finish

Nevamar Puremetals® is a registered trademark of Nevamar Corp.

